

F-SERIES

Thermal Security Cameras with IP *and* Analog Functionality



640 x 480 RESOLUTION - THE NEW STANDARD IN THERMAL SECURITY CAMERAS

F-Series high-resolution thermal security cameras are fixed-site cameras that give you video and control over both IP *and* analog networks. F-Series cameras define the new standard of performance with five models that provide full 640 x 480 thermal resolution to give you greater image detail, longer detection ranges, and better analytics performance than ever before.

BENEFITS OF 640 x 480 RESOLUTION:

High-resolution F-Series cameras have up to 16-times as many pixels as their lower-resolution counterparts, giving you:

- Sharper thermal images that provide greater scene detail; improves threat detection and alarm assessment capabilities
- Long-range threat detection; see smaller details from farther away
- Enhanced analytics performance; gives you more reliable feedback with fewer nuisance alarms
- Wider fields of view improve coverage without compromising range performance; optimize coverage efficiency while lowering overall installation cost

BENEFITS OF F-SERIES THERMAL SECURITY CAMERAS:

- Simultaneous IP and analog video outputs, along with IP and serial control interfaces for easy integration into IP or analog networks; use them in an existing analog environment, and migrate easily to a future IP network
- Sun-safe VOx uncooled thermal sensor technology; looking directly at the sun won't damage FLIR uncooled thermal security cameras
- Exchangeable camera cassettes allow for quick upgrade or repair of sensors and optics
- Open IP standards for plug-and-play integration; ONVIF compliant
- Streaming digital video available in H.264, MPEG-4, or M-JPEG formats



Camouflaged intruders are invisible to daylight CCD cameras, but people can't hide their heat from FLIR thermal imagers.

F-SERIES

Camera Platform Type	Fixed	Fixed	Fixed
THERMAL CAMERA SPECS			
Array Format (NTSC)	160 x 120	320 x 240	640 x 480
Detector Type	Long-Life, Uncooled VOx Microbolometer	Long-Life, Uncooled VOx Microbolometer	Long-Life, Uncooled VOx Microbolometer
Effective Resolution	19,200	76,800	307,200
Pixel Pitch	25 µm	25 µm	17 µm
Field Of View	24° x 20° (F-124; 9 mm) 17° x 14° (F-117; 13 mm) 12° x 10° (F-112; 19 mm)	48° x 39° (F-348; 9 mm) 34° x 28° (F-334; 13 mm) 24° x 19° (F-324; 19 mm) 13° x 10° (F-313; 35 mm) 7° x 5° (F-307; 65 mm) 4.6° x 3.7° (F-304; 100 mm)	45° x 37° (F-645; 13 mm) 25° x 20° (F-625; 25 mm) 18° x 14° (F-618; 35 mm) 12° x 10° (F-612; 50 mm) 10° x 8° (F-610; 65 mm) 6.2° x 5° (F-606; 100 mm)
Zoom	2x E-zoom	2x & 4x E-zoom	2x & 4x E-zoom
Spectral Range	7.5 µm to 13.5 µm	7.5 µm to 13.5 µm	7.5 µm to 13.5 µm
Focus Range	Athermalized, focus-free	Athermalized, focus-free	Athermalized, focus-free
Frame Rate	NTSC: 30 Hz; PAL 25 Hz	NTSC: 30 Hz; PAL 25 Hz	NTSC: 30 Hz; PAL 25 Hz

OUTPUTS

Composite Video NTSC or PAL	Standard	Standard	Standard
Video Over Ethernet	Two independent channels of streaming MPEG-4, H.264, or M-JPEG	Two independent channels of streaming MPEG-4, H.264, or M-JPEG	Two independent channels of streaming MPEG-4, H.264, or M-JPEG



CONTROL

Point To Point (stand alone)	Standard	Standard	Standard
Ethernet	Standard	Standard	Standard
Serial	RS-232/-422; Pelco D, Bosch	RS-232/-422; Pelco D, Bosch	RS-232/-422; Pelco D, Bosch
Network Enabled	Standard	Standard	Standard

GENERAL *

Weight	~10.0 lb (configuration dependent)	~10.0 lb (configuration dependent)	~10.0 lb (configuration dependent)
Dimensions (L,W,H)	18.1" x 5.5" x 6.3"	18.1" x 5.5" x 6.3"	18.1" x 5.5" x 6.3"
Power Requirements	24 VAC (20-30 VAC) 24 VDC (21-30 VDC)	24 VAC (20-30 VAC) 24 VDC (21-30 VDC)	24 VAC (20-30 VAC) 24 VDC (21-30 VDC)
Power Consumption	24 VAC: 15 VA (max w/o heaters); 51 VA (max w/heaters) 24 VDC: 10 W (max w/o heaters); 46 W (max w/heaters)	24 VAC: 15 VA (max w/o heaters); 51 VA (max w/heaters) 24 VDC: 10 W (max w/o heaters); 46 W (max w/heaters)	24 VAC: 15 VA (max w/o heaters); 51 VA (max w/heaters) 24 VDC: 10 W (max w/o heaters); 46 W (max w/heaters)

* Consult installation manual for complete details

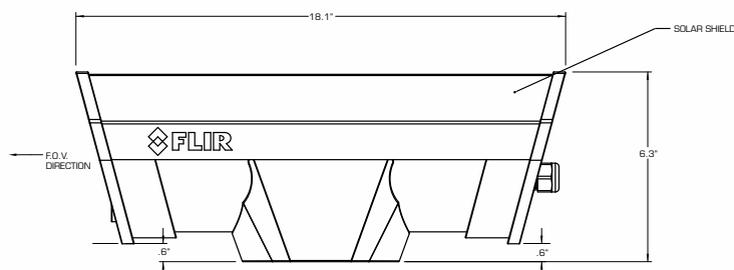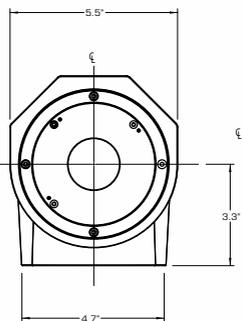

SANTA BARBARA
FLIR Systems, Inc.
 70 Castilian Dr.
 Goleta, CA 93117
 USA
 PH: + 1 805.964.9797
 PH: + 1 877.773.3547 (Sales)
 PH: + 1 888.747.3547 (Apps)
 FX: + 1 805.685.2711
 sales@flir.com

THE NETHERLANDS
FLIR Systems BV
 Charles Petitweg 21
 4847 NW Teteringen - Breda
 The Netherlands
 PH: +31 (0) 765.794194
 FX: +31 (0) 765.794199
 flir@flir.com

CORPORATE HEADQUARTERS
FLIR Systems, Inc.
 27700 SW Parkway Ave.
 Wilsonville, OR 97070
 USA
 PH: + 1 503.498.3547
 FX: + 1 503.498.3153

www.flir.com

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery used for illustration purposes only. ©2011 FLIR Systems, Inc. Specifications are subject to change without notice, check our website: www.flir.com. 1001-033 rev. 3/11

