


Control Cabinet Models 336 & 336S

Part of the Intelight Complete Traffic Framework

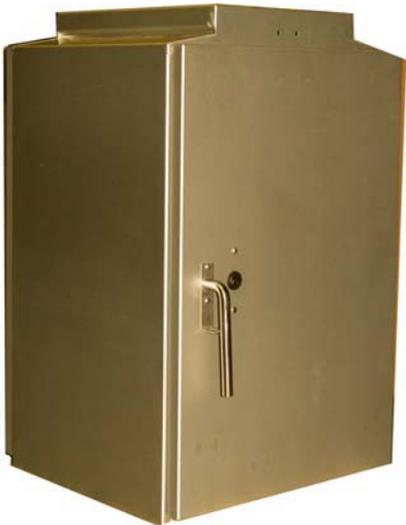

- Two Door 36"H X 24"W X 22"D (336) or 46"H X 24"W X 22"D (336S) Cabinet.
 - Heavy Duty 0.125 Thick Aluminum Cabinet with Removable Self-standing Rack Assembly.
 - Meets All Caltrans TEES Model 336 Requirements.
 - Mounting Options-Base Mounted with 2- 3/4" X 16" Anchor Bolts (Bolts & Pedestal are Optional).
 - Side of Pole Mounting (with Optional Brackets)
 - Top of Pole Mount (with Optional Hardware)
-
- Three point Door Locking system w/ Pelco Locks and # 2 keying standard.
 - Anodized Finish is standard (Bare or Power Coat Finish Colors Optional).
 - Stainless Steel Door Handles with Padlocking capability.
 - Two-position Door Stops on Top and Bottom of Front and Rear Doors.
 - Standard Police Panel with On/Off and Auto/Flash Switches (Auto/Manual Switch w/Police Step Switch & cord Optional).
 - Fluorescent Lights Front and Rear (Optional).

Cabinet (without controller, detectors, load switches and transfer relays) is sold as Enclosure/Rack only or in one of five standard system assembly configurations (others available as options):

- Model 336-A 2-8 Phase Configuration in 36"H X 24"W X 22"D housing (TEES Chapter 6 Housing #2).
- Model 336-B 2-4 Phase Configuration in 36"H X 24"W X 22"D housing (TEES Chapter 6 Housing #2).
- Model 336-S same as 336A in 46"H X 24"W X 22"D housing (TEES Chapter 7 ITS Housing).
- Model 336-6i 6 Channel Serial cabinet configuration in 36"H X 24"W X 22"D housing (TEES Chapter 6 Housing #2).
- Model 336-S14i 14 Channel Serial cabinet configuration in 46"H X 24"W X 22"D housing (TEES Chapter 7 ITS Housing).

Please contact us by phone at (520) 795-8808
e-mail at info@intelight-its.com
check our web site www.intelight-its.com
contact craig.gardner@intelight-its.com

